

TIANNENG BATTERY GROUP CO., LTD
TIANNENG INTERNATIONAL CO., LIMITED


 +86-572-6058015

 +86-572-6058015

 info@tianneng.com

 www.tiannengglobal.com

 **HQ Add:**
18#Baoqiao Rd.Huaxi industry park.Changxing.
Zhejiang Province.China

 **INT HQ Add:**
Block C.6/F shun shing plaza, 50 stanley
street, central, Hong Kong

 Tianneng Group Official

 Tianneng Group Official (@GroupTianneng)

 Tianneng Group



Website



Electronic brochure



GREEN ENERGY FOR A BETTER LIFE

TIANNENG BATTERY ENERGY STORAGE SOLUTION

PRODUCT BROCHURE



\$11.6 billion

2023 Annual Sales

A+H Listed

6888.19.SH/00819.HK

4000+

Patents

No.21

Global New Energy Enterprise Ranking

Company Profile

Tianneng is a Global Leading New Energy Company committed to providing environmentally-friendly battery solutions for various industries worldwide since 1986.

Tianneng now has more than 30,000 employees and more than 160 subsidiaries around the world. There are 18 production bases in 7 provinces in China and 1 overseas manufacturing center in Vietnam. Tianneng set up 7 R&D centers to constantly develop technology and keep innovation in the area of lead acid batteries, lithium batteries, hydrogen Fuel Cells, and Sodium-ion batteries.


Honor:

- Top 1 in China Lead Acid Battery
- Top 10 in the Chinese battery industry
- Top 500 Chinese enterprises
- Global top 500 new energy enterprises

Main Business areas:

- Battery and system Solutions (Motive, SLI, Energy Storage)
- Battery Recycling Solutions (Lead Acid battery recycling, Lithium-ion battery recycling)

Milestone

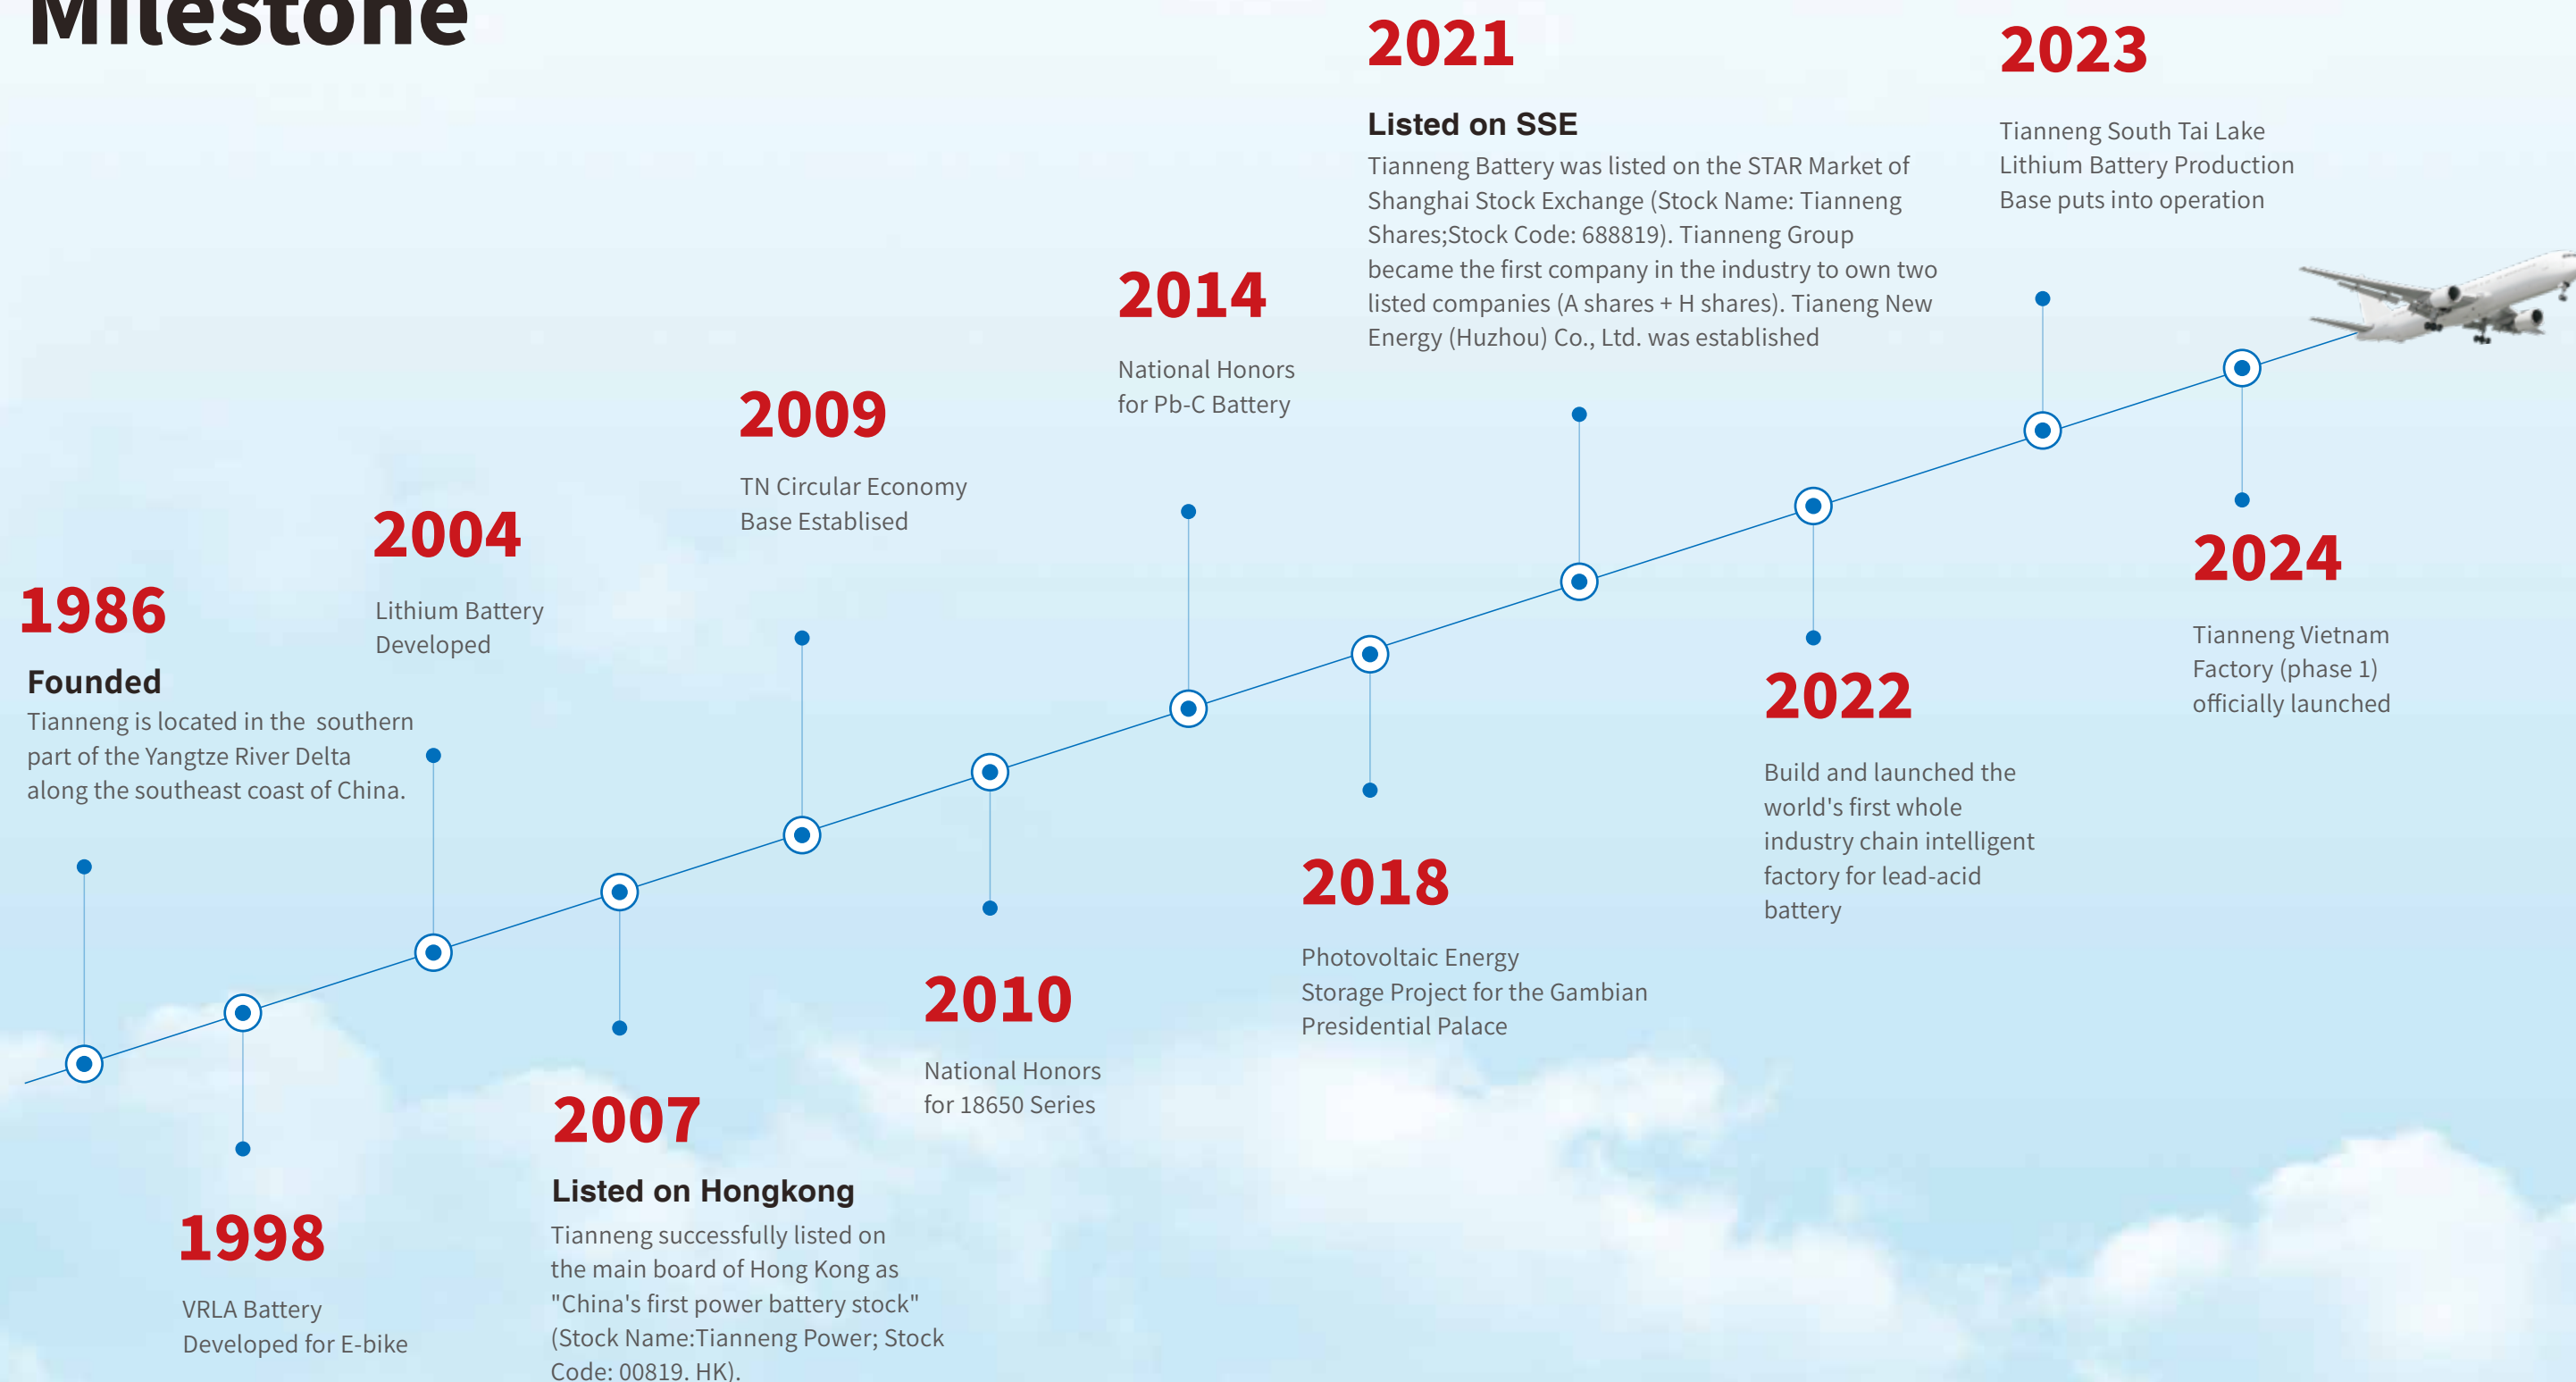

Global Footprint

- 100+ Countries Footprint.
- 11+ Oversea Branches.
- Tianneng has a global footprint around the world, our business covers more than 100 countries and regions.
- **Market Performance**
2023 Global Delivery: **110Gwh+**

Headquarters

- **HQ:** Huzhou, Zhejiang, China
- **INT HQ:** Hongkong, China

Branch

- **APAC:** Vietnam, Thailand, Indonesia, Philippines, Australia & New Zealand
- **South Asia:** India
- **MENA (Middle East and North Africa) :** Turkey, Nigeria
- **Americas:** Argentina, Colombia
- **Europe:** Netherlands



Technology And Innovation

Tianneng has the first domestically-made motive battery automatic continuous casting, rolling, continuous punching, and continuous coating production demonstration line, as well as the first domestically-made small-density power battery intelligent automatic assembly demonstration production line and other digital production lines, forming a complete digital industry. Tianneng's supply chain has significant advantages in high equipment utilization, relatively stable production capacity, high product quality, flexible operation, and excellent product adaptability.



I Advantages and Strengths



Material Innovation

Research and innovation and on NCM/LFP/LMFP material, guarantee the performance and safety from start point



Manufacturing Development

Fully-automated manufacturing system maintains a high-level of consistency on cells and packs.




SELF-DEVELOPMENT BMS


Providing intelligent and customized management through accurate battery dynamic monitoring technology.





Premium Safety And Performance


Intelligent Protection


- 


Over-discharge Protection
- 


Over-charge Protection
- 

Cell-balance Mechanism
- 


Short-circuit Prevention
- 

Over-current Protection
- 

Instant-impact Protection
- 

Cut-off Monitoring
- 

GPS Function Available

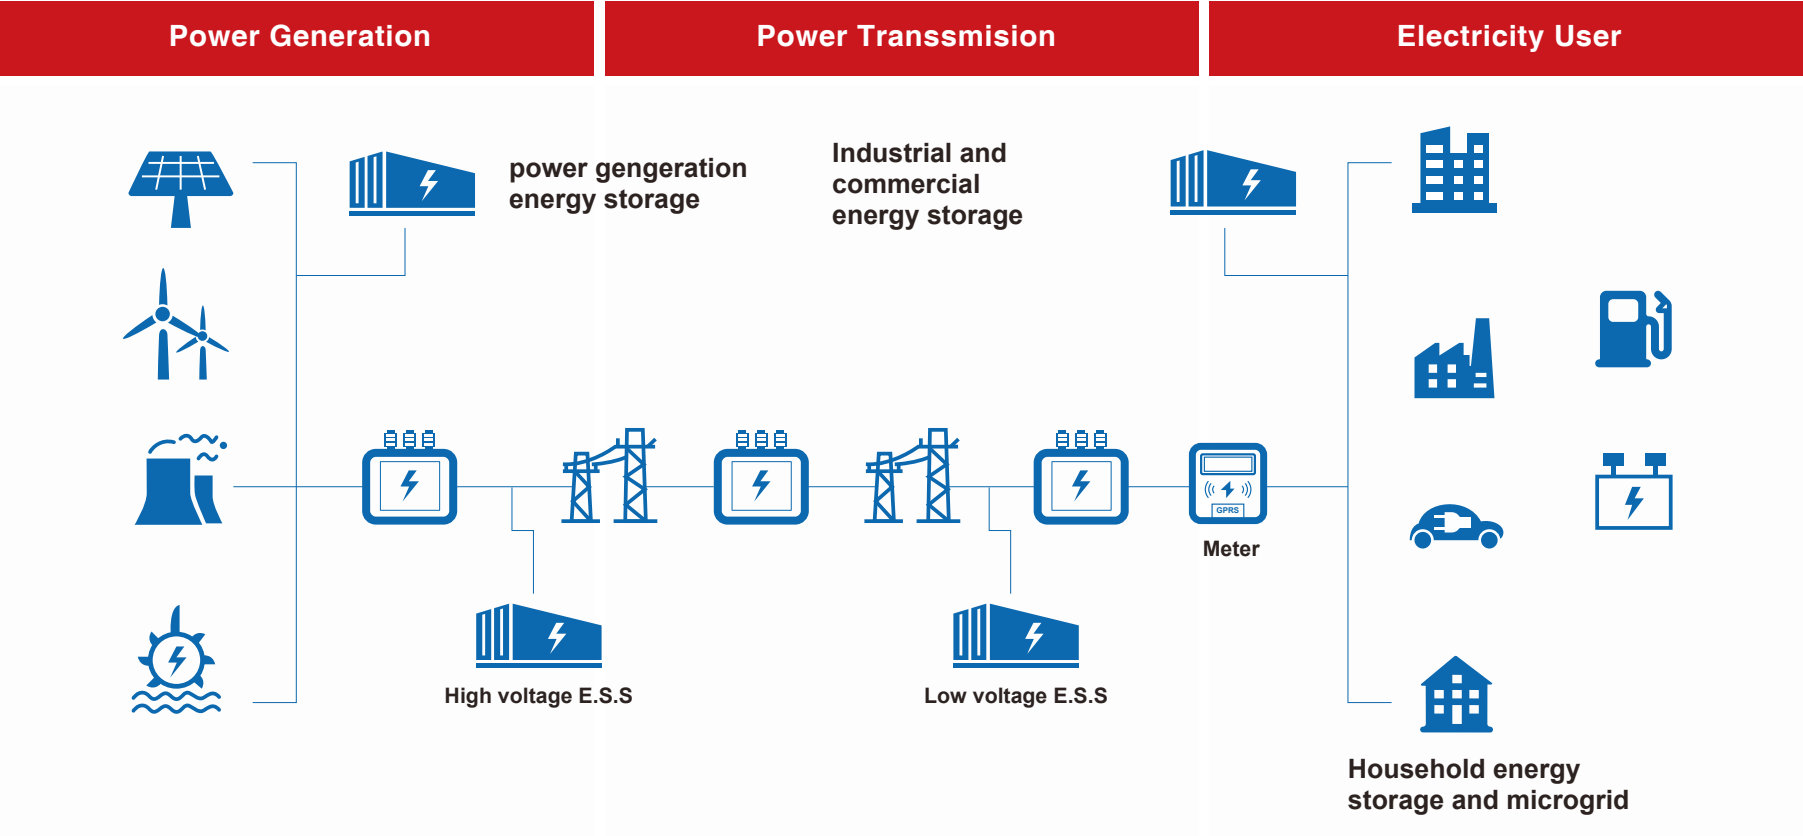

Energy storage cells



Product Model	TNSA39148100B50	TNSA50160119B100
Cell material system	LFP	LFP
Nominal voltage	3.2V	3.2V
Rated capacity	50Ah	100Ah
Mass energy density	≥ 150Wh/kg	≥ 170Wh/kg
Volumetric energy density	≥ 300Wh/L	≥ 366Wh/L
Operating voltage range	2.5~3.65V	2.5~3.65V
Operating temperature range	- 35℃ ~ 65℃	- 35℃ ~ 65℃
Rated charge/rated discharge	0.5C/0.5C	0.5C/0.5C
Cycle Life (@25℃)	≥ 4000cycle(@70%SOH) 100%DOD/25℃ @ 0.5C/0.5C	≥ 4000cycle(@70%SOH) 100%DOD/25℃ @ 0.5C/0.5C
Dimensions (including poles)	39.7×149.1×98.3mm	49.9×160.8×119mm
Product certificates	UN38.3, UL1973, UL9540A, ROHS, CB	



Product Model	TNSA79148120B150	TNSA54173207B180
Cell material system	LFP	LFP

Nominal voltage	3.2V	3.2V
Rated capacity	150Ah	180Ah
Mass energy density	≥ 175Wh/kg	≥ 150Wh/kg
Volumetric energy density	≥ 363Wh/L	≥ 335Wh/L
Operating voltage range	2.5~3.65V	2.5~3.65V
Operating temperature range	- 35℃ ~ 65℃	- 35℃ ~ 65℃
Rated charge/rated discharge	0.5C/0.5C	0.5P/0.5P
Cycle Life (@25℃)	≥ 4000cycle(@70%SOH) 100%DOD/25℃ @ 0.5C/0.5C	≥ 12000cycle(@70%SOH); 90%DOD/25℃ @ 0.5P/0.5P ≥ 10000cycle(@70%SOH); 90%DOD/25℃ @ 1P/1P
Dimensions (including poles)	79.2×148.5×120.3mm	53.7×174×207mm
Product certificates	UN38.3, UL1973, UL9540A, ROHS,CB	GBT36276, GBT31484, GBT31486, GB38031, UL1973, UL9540A, CB, ROHS, UN38.3, BIS



Product Model	TNSA71173207B280	TNSA71173207B314
Cell material system	LFP	LFP
Nominal voltage	3.2V	3.2V
Rated capacity	280Ah	314Ah
Mass energy density	≥ 173Wh/kg	≥ 185Wh/kg
Volumetric energy density	≥ 383Wh/L	≥ 420Wh/L
Operating voltage range	2.5~3.65V	2.5~3.65V
Operating temperature range	- 35℃ ~ 65℃	- 35℃ ~ 65℃
Rated charge/rated discharge	0.5P/0.5P	0.5P/0.5P
Cycle Life (@25℃)	≥ 8000cycle(@70%SOH) 100%DOD/25℃ @ 0.5P/0.5P	≥ 10000cycle(@70%SOH) 100%DOD/25℃ @ 0.5P/0.5P
Dimensions (including poles)	71.7×173.8×207.2mm	71.7×173.8×207.2mm
Product certificates	GBT36276, GBT31484, GBT31486, GB38031, UL1973, UL9540A, CB, ROHS, UN38.3, BIS	



Application

- Household
- Solar Energy
- Other renewable energy



Application

- UPS/EPS
- Telecommunication
- Electric Power



Application

- Power grid
- Power station
- Power plant

Energy Storage System

Tianneng offers solutions for energy storage, reserves, and various industrial scenarios, delivering exceptional product performance, stability, and reliability.

Tianneng provides customers with a reliable green energy guarantee.

Product Series

- Household energy system
- Commercial and Industrial ESS
- Container C&I ESS

HESS

Household energy storage system

Green house with economic energy



Product Application



Saving Electricity Bill

Charging during off-peak hours and discharge during peak hours, save the bill by avoiding peak hours.



Self-consumption

Balance the solar generation with evening demand, and realize your own grid independence.



Back-up Power

Guarantee your electricity is available when you encounter with a black-out or emergency.

Stackable HESS Products

Low voltage model

Stackable LiFePO4 Battery for Energy Storage System


- 51.2V Low voltage LiFePO4 battery module, Single module is 51.2V 100Ah 5.12kWh.
- 1 to MAX.6 layers recommended.
- Compatible with the 48V single or three-phase off-grid, hybrid on/off grid solar inverter.
- Capable of High-Powered Emergency-Backup and Off-Grid Function.
- Self-Consumption Optimization for Residential and Commercial Applications.
- Modular Design Simplifies Transport and Installation



PRODUCT FEATURE

- >6000 Times Super Cycle Life
- IP65 waterproof design
- Premium safety and Long-term reliability
- Money saving & Flexible compatibility
- Low self-consumption maximization
- Affordable and simple installation

CERTIFICATES

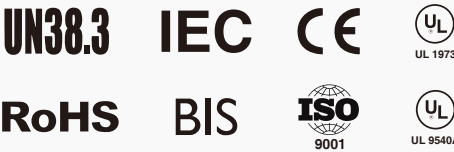

APPLICATION

- Household Energy Storage System
- Household Photovoltaic System
- Outdoor portable power station
- Removable power supply system

LOW VOLTAGE MODEL

Model		TELiF-HESS 48100 GL	TELiF-HESS 4850 GL
Battery Module	Single Module	51.2V 100Ah	51.2V 50Ah
	Battery Energy	5120 Wh	2560 Wh
	Nominal Charge/Discharge Current	50A	25A
	Max Charge/Discharge Current	100A	50A
	Working Voltage	43.2~56.16Vdc	
General Specification	Dimension (WxDxH)	600*210*300mm	600*210*180mm
	Weight	48kg	27kg
	Scalability	1-6 batteries in parallel	1-10 batteries in parallel
	Installation	Stacked	
	Charge Temperature	0°C~55°C	
	Discharge Temperature	-20°C~60°C	
	IP Rating	IP 65	
	Cell Technology	LiFePO4	
	Cycle Life	6000 @ 80% DOD, 25°C/0.5C	
	Communication	RS485、CAN	
Communication	Display	SOC status indicator, LED indicator	

Stackable HESS Products

High voltage HESS model

Stackable LiFePO4 Battery for Energy Storage System

- High-voltage LiFePO4 battery solution, Single module is 51.2V 50Ah 2.56kWh.
- 3 to 10 layers recommended.
- Inverter you need to choose 380V three-phase input and output, common is 8-15KW inverter.
- Applicable on-grid or hybrid on and off-Grid solar energy storage system.
- Self-Consumption Optimization for Residential and Commercial Applications.



PRODUCT FEATURE

- >6000 Times Super Cycle Life
- IP65 waterproof design
- Premium safety and Long-term reliability
- Money saving & Flexible compatibility
- Low self-consumption maximization
- Affordable and simple installation

CERTIFICATES



APPLICATION

- Household Energy Storage System
- Household Photovoltaic System
- Outdoor portable power station
- Removable power supply system

HIGH VOLTAGE MODEL

	Model	TELiF-HESS 4850 GH
Battery Module	Single Module	51.2V 50Ah
	Battery Energy	2560 Wh
	Nominal Charge/Discharge Current	25A
	Max Charge/Discharge Current	50A
	Dimension(WxDxH)	600*210*160mm
	Weight	26.5kg
High-voltage Box	Dimension(WxDxH)	600*210*250mm
	Weight	23kg
	Scalability	3-10 batteries in series
General Specification	Installation	stacked
	Charge Temperature	0°C~55°C
	Discharge Temperature	-20°C~60°C
	IP Rating	IP 65
	Cell Technology	LiFePO4
	Cycle Life	6000 @ 80% DOD, 25°C/0.5C
Communication	Communication	RS485、CAN
	Display	SOC status indicator, LED indicator

Wall Mounted HESS Products

Low voltage model

integrated LiFePO4 Battery for Energy Storage System

- 51.2V Low voltage LiFePO4 battery module, Single module is 51.2V 100Ah /200aH 5.12kWh/10.24KWh.
- Max 15 batteries in parallel.
- Compatible with the 48V single or three-phase off-grid, hybrid on/off grid solar inverter.
- Capable of High-Powered Emergency-Backup and Off-Grid Function.
- Self-Consumption Optimization for Residential and Commercial Applications.
- Modular Design Simplifies Transport and Installation



PRODUCT FEATURE

- >6000 Times Super Cycle Life
- IP65 waterproof design
- Premium safety and Long-term reliability
- Money saving & Flexible compatibility
- Low self-consumption maximization
- Affordable and simple installation

CERTIFICATES



APPLICATION

- Household Energy Storage System
- Household Photovoltaic System
- Outdoor portable power station
- Removable power supply system

LOW VOLTAGE MODEL

Model		TELiF-HESS 48100 W	TELiF-HESS 48200 W
Performance	Specification	51.2V 100Ah	51.2V 200Ah
	Battery Energy	5120 Wh	10240 Wh
	Nominal Charge/ Discharge Current	50A	100A
	Max Charge/ Discharge Current	100A	200A
	Working Voltage	43.2~56.16Vdc	43.2~56.16Vdc
General Specificaition	Dimension(WxDxH)	520*141.5*470mm	800*590*142mm
	Weight	45.75kg	96.5kg
	Installation	Wall mounted/Floor stand	
	Charge Temperature	0°C~55°C	
	Discharge Temperature	-20°C~60°C	
Communication	IP Rating	IP 65	
	Cell Technology	LiFePO4	
	Cycle Life	6000 @ 80% DOD, 25°C/0.5C	
	Scalability	Max 15 batteries in parallel	
	Communication	RS485、CAN	
Communication	Display	SOC status indicator, LED indicator	

TTLiF-48100C

48V100Ah

Rechargeable Li-ion
Telecom Battery-LFP Series



Product Application



Communication




Data Center



Industrial Application



Wind Power



Solar Power



Electric Power

PRODUCT FEATURES

- Prismatic LiFePO4 cell, higher reliability
- Long design life up to 10+ years @25°C
- Fully replaceable with current batteries (e.g., Lead-acid and Ni-Cd)
- Built-in BMS management system with interface CAN/RS232/RS485/SNMP/GPS +Anti theft (optional)
- Maintenance free with standard 19” design easy installation
- Optimum adaptation to a variety of applications with series & parallel expansion support

CERTIFICATES



PARAMETER

Nominal Characteristics	Nominal Voltage	48V
	Nominal Capacity (@0.2C)	100Ah
	Nominal Energy	4800Wh
	Internal Resisitance	≤55mΩ
	Self Discharge Rate	≤3.5% per month
	Cycle Life (@25°C, 0.2C, 80%DOD)	up to 10+ years
	Parallel Connection Support	Max. 15 packs in parallel, recommended ≤ 12 packs
	Series Connection Support	not supported
Charging Specificaitions	Recommended Charging Voltage	54.7Vdc
	Max. Charging Current	100A
	Discharging Cut-off Voltage	40V
Discharging Specificaitions	Max. Discharging Continuous Current	75A
	Max. Discharging Pulse Current	120A, ≤20MS
	Length	440mm
Mechanical Characteristics	Depth	440mm
	Height	133mm
	Total Height	133mm
	Weight	Approx. 43Kg
	Communication Interface	CAN/RS232/SNMP/RS485
	Charge Temperature	0°C~60°C (32°F to 140°F)
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
Operating Conditions	Storage Temperature	0°C to 60°C (32°F to 140°F)
	Water Dust Resistance	IP20
	Safety & Certification	
Certification	Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea

TTLiF-48150C

48V150Ah

Rechargeable Li-ion
Telecom Battery-LFP Series



Product Application



Communication



Data Center



Industrial Application



Wind Power



Solar Power



Electric Power

PRODUCT FEATURES

- Prismatic LiFePO4 cell, higher reliability
- Long design life up to 10+ years @25°C
- Fully replaceable with current batteries (e.g., Lead-acid and Ni-Cd)
- Built-in BMS management system with interface CAN/RS232/RS485/SNMP/GPS +Anti theft (optional)
- Maintenance free with standard 19” design easy installation
- Optimum adaptation to a variety of applications with series & parallel expansion support

CERTIFICATES

UN38.3

RoHS

IEC



CE

PARAMETER

Nominal Characteristics

Nominal Voltage	48V
Nominal Capacity (@0.2C)	150Ah
Nominal Energy	7200Wh
Internal Resisitance	≤55mΩ
Self Discharge Rate	≤3.5% per month
Cycle Life (@25°C, 0.2C, 80%DOD)	up to 10+ years
Parallel Connection Support	Max. 15 packs in parallel, recommended ≤ 12 packs
Series Connection Support	not supported

Charging Specificaitions

Recommended Charging Voltage	54.7Vdc
Max. Charging Current	100A
Discharging Cut-off Voltage	40V

Discharging Specificaitions

Max. Discharging Continuous Current	75A
Max. Discharging Pulse Current	120A, ≤20MS

Mechanical Characteristics

Length	442mm
Depth	550mm
Height	133mm
Total Height	133mm
Weight	Approx. 58Kg
Communication Interface	CAN/232/SNMP/485

Operating Conditions

Charge Temperature	0°C~60°C (32°F to 140°F)
Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
Storage Temperature	0°C to 60°C (32°F to 140°F)
Water Dust Resistance	IP20

Certification

Safety & Certification	
Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea

TTLiF-48150-T

48V150Ah

Rechargeable Li-ion
Telecom Battery-LFP Series



Product Application



Communication



Data Center



Industrial Application



Wind Power



Solar Power



Electric Power

PRODUCT FEATURE

- Rack mounted battery 3U size
- Longer cycle life
6000cycles@80%DOD.
- Low self-consumption
- Lithiumironphosphate technology, safe andreliable.
- Affordable and simple installation
- Optimum adaptation to a variety of applications with parallel expansionsupport

CERTIFICATES

UN38.3

RoHS

IEC



CE

PARAMETER

Nominal Characteristics	Nominal Voltage	48V
	Nominal Capacity (@0.2C)	150Ah (15S)
	Nominal Energy	7200Wh
	Installation	Rack mounted
	Self Discharge Rate	≤3.5% per month
	CycleLife (@25°C, 0.2C, 80%DOD)	up-to 10+ years.
Charging Specificaitions	Scalability	Max15 batteries in parallel
	Recommended Charging Voltage	54Vdc
	Max. Charging Current	105A
Discharging Specificaitions	Discharging Cut-off Voltage	40.5V
	Max. Discharging Continuous Current	75A
	Max. Discharging Pulse Current	150A, ≤100MS
	Depth	570mm
Mechanical Characteristics	Width	442mm
	Height	130.5mm
	Total Height	130.5mm
	Weight	Approx. 64Kg
	Communication Interface	CAN/RS232/RS485
	Charge Temperature	0°C~+55°C
Operating Conditions	Discharge Temperature	-20°C~+55°C
	Storage Temperature	-20°C~+45°C
	Water Dust Resistance	IP20
	Safety & Certification	CE, IEC62619
Certification	Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea


TTLiF-48200C

48V200Ah


Rechargeable Li-ion
Telecom Battery-LFP Series



Product Application




Household Energy storage
system



Household photovoltaic
system



Rack mounted
3U



Removable power supply
system

PRODUCT FEATURES

- Prismatic LiFePO4 cell, higher reliability
- Long design life up to 10+ years @25°C
- Fully replaceable with current batteries (Lead-acid, Ni-Cd)
- Built-in BMS management system with interface CAN/RS232/SNMP/GPS+Anti theft (optional)
- Maintenance free with standard 19” design easy installation
- Optimum adaptation to a variety of applications with series & parallel expansion support

CERTIFICATES



PARAMETER

Nominal Characteristics	Nominal Voltage	48V
	Nominal Capacity (@0.2C)	200Ah
	Nominal Energy	9600Wh
	Internal Resisitance	≤55mΩ
	Self Discharge Rate	≤3.5% per month
	Cycle Life (@25°C, 0.2C, 80%DOD)	up to10+ years
	Parallel Connection Support	5
	Series Connection Support	not supported
Charging Specifcations	Recommended Charging Voltage	54.7Vdc
	Max. Charging Current	100A
	Discharging Cut-off Voltage	40V
Discharging Specifcations	Max. Discharging Continuous Current	75A
	Max. Discharging Pulse Current	120A, ≤20MS
	Length	440mm
Mechanical Characteristics	Depth	550mm
	Height	222mm
	Total Height	222mm
	Weight	Approx. 72Kg
	Communication Interface	CAN/RS232/SNMP/RS485
	Charge Temperature	0c~60°C (32°F to 140°F)
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
Operating Conditions	Storage Temperature	0°C to 60°C (32°F to 140°F)
	Water Dust Resistance	IP20
	Safety & Certification	
Certification	Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea

TELiF-48100B

51.2V100Ah

Rechargeable Li-ion
ESS Battery-LFP Series



PRODUCT FEATURES

- Prismatic LiFepo4 cell-3.2v, higher reliability
- Longer cyclelife 26000 cycles@80%DOD.
- Fully replaceable with current batteries (e.g., Lead-acid and Ni-cd)
- Built-in BMS management system with interface RS232/RS485/CAN
- Maintenance free with standard 19" design easyinstallation
- Optimum adaptation to a variety of applications with parallel expansion support Bluetooth, WIFI function (optional)

CERTIFICATES



APPLICATION

- Communication
- Data Center
- Industrial Application
- Wind Power
- Solar Power
- Electric Power

PARAMETER

Nominal Characteristics	Nominal Voltage	51.2V
	Nominal capacity (@0.2c)	100Ah
	Nominal Energy	5120Wh
	Internal Resisitance	≤30mΩ
	Self Discharge Rate	≤3.5% per month
	cycleLife (@25"°C, 80%DoD)	6000 cycles
Charging Specifcaitions	Battery Parallel connection Support	Max 20 when connected in parallel
	Recommended charging Voltage	56.0-57.6V
	Recommended chargingcurrent	50A
	Max. charging current	100A
Discharging Specifcaitions	Discharging cut-off Voltage	44.8V
	Recommended Discharge current	50A
	Max. Discharging continuous current	100A
Mechanical Characteristics	Width	390mm
	Depth	130mm
	Height	600mm
	Total Height	637mm
	Weight	about 90KG
	Communication Interface	R485/CAN
Operating Conditions	Charge Temperature	0°C to 45°C (32°F to 113°F)
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
	Storage Temperature	0°C to 45°C (32°F to 113°F)
	Water Dust Resistance	IP54
Certification	Safety & Certification	
	Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea

TELiF-48150B

51.2V150Ah

Rechargeable Li-ion
ESS Battery-LFP Series



PRODUCT FEATURES

- Prismatic LiFepo4 cell-3.2v, higher reliability
- Longer cycle life 6000 cycles@80%DOD.
- Fully replaceable with current batteries (Lead-acid,Ni-cd)
- Built-in BMS management system with interface RS232/RS485/CAN
- Maintenance free with standard 19" design easy installation
- Optimum adaptation to a variety of applications with parallel expansion support Bluetooth, WIFI functions are optional

CERTIFICATES



APPLICATION

- Communication
- Data Center
- Industrial Application
- Wind Power
- Solar Power
- Electric Power

PARAMETER

Nominal Characteristics	Nominal Voltage	51.2V
	Nominal capacity (@0.2c)	150Ah
	Nominal Energy	7680Wh
	Internal Resisitance	≤30mΩ
	Self Discharge Rate	≤3.5% per month
	cycleLife (@25"°C, 80%DoD)	26000 cycles
Charging Specifcations	Battery Parallel connection Support	Max 20 connected in parallel
	Recommended charging Voltage	56.0-57.6V
	Recommended charging current	75A
	Max. charging current	150A
Discharging Specifcations	Discharging cut-off Voltage	44.8V
	Recommended Discharge current	75A
	Max. Discharging continuous current	150A
Mechanical Characteristics	Width	665mm
	Depth	135mm
	Height	482mm
	Total Height	519mm
	Weight	About 100KG
	Communication Interface	RS232/R485/CAN
Operating Conditions	Charge Temperature	0°C to 45°C (32°F to 113°F)
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
	Storage Temperature	0°C to 45°C (32°F to 113°F)
	Water Dust Resistance	IP54
Certification	Safety & Certification	
	Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea

TELiF-48200B

51.2V200Ah

Rechargeable Li-ion
ESS Battery-LFP Series



PRODUCT FEATURES

- Prismatic LiFepo4 cell-3.2v, higher reliability
- Longer cycle life 6000 cycles@80%DOD.
- Fully replaceable with current batteries (Lead-acid,Ni-cd)
- Built-in BMS management system with interface RS232/RS485/CAN
- Maintenance free with standard 19" design easy installation
- Optimum adaptation to a variety of applications with parallel expansion support Bluetooth, WIFI functions are optional

CERTIFICATES



APPLICATION

- Communication
- Data Center
- Industrial Application
- Wind Power
- Solar Power
- Electric Power

PARAMETER

Nominal Characteristics	Nominal Voltage	51.2V
	Nominal capacity (@0.2c)	200Ah
	Nominal Energy	10240Wh
	Internal Resisitance	≤30mΩ
	Self Discharge Rate	≤3.5% per month
	cycleLife (@25"°C, 80%DoD)	26000 cycles
	Battery Parallel connection Support	Max.16
Charging Specificaltions	Recommended charging Voltage	57.6Vdc
	Recommended charging current	100A
	Max. charging current	200A
	Discharging cut-off Voltage	43.2V
Discharging Specificaltions	Recommended Discharge current	100A
	Max. Discharging continuous current	210A
	Width	490mm
Mechanical Characteristics	Depth	130mm
	Height	900mm
	Total Height	937mm
	Weight	115Kg
	Communication Interface	RS232/R485/CAN
Operating Conditions	Charge Temperature	0°C to 45°C (32°F to 113°F)
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
	Storage Temperature	-20°C -60°C
	Water Dust Resistance	IP54
Certification	Safety & Certification	/
	Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea

TELiF-48100C

51.2V100Ah

Rechargeable Li-ion
ESS Battery-LFP Series



Product Application



Communication



Data Center



Industrial Application



Wind Power



Solar Power



Electric Power

PRODUCT FEATURES

- Prismatic LiFepo4 cell-3.2v, higher reliability
- Longer cycle life 6000 cycles@80%DOD.
- Fully replaceable with current batteries (e.g., Lead-acid and Ni-cd)
- Built-in BMS management system with interface RS232/RS485/CAN
- Maintenance free with standard 19" design easy installation
- Optimum adaptation to a variety of applications with parallel expansion support Bluetooth, WIFI functions are optional

CERTIFICATES

UN38.3

RoHS

IEC



CE

PARAMETER

Nominal Characteristics	Nominal Voltage	51.2V
	Nominal capacity (@0.2c)	100Ah
	Nominal Energy	5120Wh
	Internal Resisitance	≤30mΩ
	Self Discharge Rate	≤3.5% per month
	cycleLife (@25"°C, 80%DoD)	6000 cycles
Charging Specifcations	Battery Parallel connection Support	Max 20 connected in parallel
	Recommended charging Voltage	56.0-57.6V
	Recommended charging current	50A
	Max. charging current	100A
Discharging Specifcations	Discharging cut-off Voltage	44.8V
	Recommended Discharge current	50A
	Max. Discharging continuous current	100A
Mechanical Characteristics	Width	440mm
	Depth	440mm
	Height	133mm
	Total Width	483mm (19 Rack mounte type)
	Weight	Approx. 46Kg
	Communication Interface	RS232/R485/CAN
Operating Conditions	Charge Temperature	0°C to 45°C (32°F to 113°F)
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
	Storage Temperature	0°C to 45°C (32°F to 113°F)
	Water Dust Resistance	IP20
Certification	Safety & Certification	
	Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea


TELiF-48150C

48V150Ah


Rechargeable Li-ion
ESS Battery-LFP Series




Product Application




Communication




Data Center




Industrial Application



Wind Power



Solar Power



Electric Power

PRODUCT FEATURES

- Prismatic LiFepo4 cell-3.2v, higher reliability
- Longer cycle life 6000 cycles@80%DOD.
- Fully replaceable with current batteries (e.g., Lead-acid and Ni-cd)
- Built-in BMS management system with interface RS232/RS485/CAN
- Maintenance free with standard 19" design easy installation
- Optimum adaptation to a variety of applications with parallel expansion support Bluetooth, WIFI functions are optional

CERTIFICATES

UN38.3

RoHS

IEC

ISO 9001

CE

PARAMETER

Nominal Characteristics	Nominal Voltage	48V
	Nominal capacity (@0.2c)	150Ah
	Nominal Energy	7200Wh
	Intemal Resisitance	≤30mΩ
	Self Discharge Rate	≤3.5% per month
	CycleLife (@25"°C, 80%DoD)	26000 cycles
Charging Specificaltions	Battery Parallel connection Support	Max 20 when connected in parallel
	Recommended charging Voltage	52.5-54V
	Recommended charging current	75A
	Max. charging current	150A
Discharging Specificaltions	Discharging cut-off Voltage	42V
	Recommended Discharge current	75A
	Max.Discharging continuous current	150A
Mechanical Characteristics	Width	442mm
	Depth	568mm
	Height	133mm
	Total Width	483mm (19" Rack mounted type)
	Weight	About 53KG
	Communication Interface	RS232/R485/CAN
Operating Conditions	Charge Temperature	0°C to 45°C (32°F to 113°F)
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
	Storage Temperature	0°C to 45°C (32°F to 113°F)
	Safety Standard	UN38.3 (battery)
Certification	Water Dust Resistance	IP20
	Safety & Certification	
	Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea


TELiF-48200C

51.2V200Ah


Rechargeable Li-ion
ESS Battery-LFP Series




Product Application




Communication




Data Center




Industrial Application



Wind Power



Solar Power



Electric Power

PRODUCT FEATURES

- Prismatic LiFepo4 cell-3.2v, higher reliability
- Longer cycle life 6000 cycles@80%DOD.
- Fully replaceable with current batteries (e.g., Lead-acid and Ni-cd)
- Built-in BMS management system with interface RS232/RS485/CAN
- Maintenance free with standard 19" design easy installation
- Optimum adaptation to a variety of applications with parallel expansion support Bluetooth and WIFI functions are optional

CERTIFICATES

UN38.3

RoHS

IEC

ISO 9001

CE

PARAMETER

Nominal Characteristics	Nominal Voltage	51.2V
	Nominal Capacity (@0.2c)	200Ah
	Nominal Energy	10240Wh
	Internal Resisitance	≤30mΩ
	Self Discharge Rate	≤3.5% per month
	CycleLife (@35°C, 80%DoD)	6000 cycles
Charging Specifcations	Battery Parallel connection Support	Max.16 when connected in parallel
	Recommended charging Voltage	57.6Vdc
	Recommended charging current	100A
	Max. charging current	200A
Discharging Specifcations	Discharging cut-off Voltage	43.2V
	Recommended Discharge current	100A
	Max. Discharging continuous current	210A
Mechanical Characteristics	Width	440mm
	Depth	550mm
	Height	222mm
	Total Width	483mm (19" Rack mounted)
	Weight	Aprox. 76Kg
	Communication Interface	RS232/R485/CAN
Operating Conditions	Charge Temperature	0°C to 45°C (32°F to 113°F)
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
	Storage Temperature	-20°C -60°C
	Water Dust Resistance	IP20
Certification	Safety & Certification	
	Transportation	UN38.3, MSDS, Report for Transport of Goods by Sea

All In One Lead Carbon ESS

- Full intelligent digital energy storage equipment.
- Work continuously at full power for a long time.
Multiple DC output ports (5V/3Aports,12V/2A ports,TypeC ports).
- Built-in long-life and deep-cycle sealed valve-controlled GEL battery.
- PFC technology, high power factor, and reduce the usage of the grid.
- Advanced MPPT technology, with an efficiency of no less than 99.5%.
- Bypass automatic switching function
EMC design for the AC output, reducing interference to the AC loads.



PRODUCT FEATURE

- All-in one design
- Lead-acid/Lead carbon/LFP option
- Plug and play
- Solar/Utility power source
- Real-time monitor

APPLICATION

- Oil generator charging
- Solar charging
- Utility output
- Inverter output
- energy management

PRODUCT PARAMETERS

Model	TNAiO-1022-AL0210S2	TNAiO-1522-AL0210S1	TNAiO-2522-AL0315S1		
Utility input	Rated Utility work voltage		220VAC		
	Utility work voltage range		176VAC~285VAC		
	Utility input frequency range		45Hz-65Hz		
	Max.Utility work current (Charging+Bypass)	2.2A for charging+4.5A for bypass@220VAC	2.8A for charging+6.8A for bypass@220VAC	3.5A for charging+11.4A for bypass@220VAC	
	Utility transfer time			Utility bypass to Inverter output: <10ms Inverter output to Utility bypass: Oms	
	AC input overload relay		YES		
	Inverter output	Rated output power(@25°C)		1000W	1500W
Surge output power(5s)		1500W	2000W	4000W	
Rated output voltage		220VAC±3%			
Rated output frequency		50Hz/60Hz±0.2%			
Output wave		Pure sine wave			
Output distortion THD		≤3%(Resistive load)			
Output soft start		HAVE			

PRODUCT PARAMETERS

	Model	TNAiO-1022-AL0210S2	TNAiO-1522-AL0210S1	TNAiO-2522-AL0315S1
Solar controller	Max. PV input withstand voltage	95V	95V	145V
	Solar controller type	MPPT		
	MPPT efficiency	>99.5%		
	MPPT voltage range	30V~80V	30V~80V	30V~120V
	MPPT ways	One way	One way	One way
	Max. PV output charging current	16.5A	21A	30A
Battery	Battery type	Lead-Acid / Gel / Lead-Carbon		
	Rated battery voltage	24VDC		
	Battery work voltage range	21VDC-30VDC		
	Battery work temperature range	Discharging Mode:-20°C~55°C; Charging Mode:0C~40C		
	Rated battery capacity	55Ah*2	70Ah*2	120Ah*2

PRODUCT PARAMETERS

	Model	TNAiO-1022-AL0210S2	TNAiO-1522-AL0210S1	TNAiO-2522-AL0315S1
DC output	DC 12V port	12V2A*2		
	USB-A port	5V3A*2		
	TYPE-C (USB-C) port	TYPE C-100W*1pcs(support PD3.0 and multiple protocols)TYPE C-5V/3A*1pcs		
	DC output switch	HAVE		
Others	Work temperature range	-20°C~55°C (when the environment temperature exceeds 25°C, the charging power and load power will be reduced appropriately; working of full load is not supported.)		
	Enclosure	IP20		
	Communication method	RS485, BlueTooth (GRPS/WiFi optional)		
	LCD	Monochrome LCD, English interface		
	Warranty	Two years		
	Dimension (Length x Width x Height)	255x406x541mm (with floor mats and handles)	288x449x586mm (with wheels and handles)	435x504x574.5mm (with wheels and handles)
	Net weight	55kg	65kg	107kg

All In One Energy Storage System

- Integrated CE-certificated LFP battery and Hybrid PV inverter in one system.
- LiFePO4 battery module, Single module is 51.2V 100Ah.
- 1 to 3 layers are recommended, and every has layer 2 modules loaded.
- Cobalt Free Lithium Iron Phosphate (LFP) Battery:
- Maximum Safety, Life Cycle and Power.
- Applicable on grid or hybrid on and off-Grid solar energy storage system.
- Self-Consumption Optimization for Residential and Commercial Applications.
- Modular Design Simplifies Transportation and Installation.



US Split phase

EU Single Phase

EU Three phase

PRODUCT FEATURE

- All-in one design
- Plug and play
- Solar/Utility power source
- ≥6000 Cycle Li-ion battery
- Remote monitoring

APPLICATION

- Household power supply
- Communication base station
- Farm energy storage
- Villa power supply
- Field powersupply

CERTIFICATES

**IEC/EN62109-1/-2,
IEC/EN62477-1/UN38.3
Europe: EN50549-1,
Germany: VDE4105/0124,
UK: G99,
South Africa: NRS097-2-1:
2017UN38.3**

PRODUCT PARAMETERS-EU standard single phase

Battery

Number of layers	1 layer		2 layers		3 layers	
Model	51.2V 200Ah	51.2V 300Ah	51.2V 400Ah	51.2V 500Ah	51.2V 600Ah	
Energy (kWh)	10.24	15.36	20.48	25.6	30.72	
Weight (KG)	200	260	320	380	440	
Dimension (L*W*H) mm	653*320*1400	653*320*1950		650*320*2500		
Operating Voltage Range(V)	43.2V~56.16					
Cell technology	Lithium-iron phosphate (LiFePO4)					
Life cycle	6000 times @80%DOD 25℃ 0.5C					
Max. charge/discharge current(A)	120					

PV Input

Max. power(kW)	9	9
Max. DC voltage (V)	550	
MPPT voltage range(V)	70-520	
Max.Input current of single MPPT(A)	15/15	
String per MPPT tracker	1	
No.of MPPT trackers	2	

PRODUCT PARAMETERS-US standard TELiF-Ai0 48100 US

Battery

Number of layers	1 layer		2 layers		3 layers	
Model	51.2V 200Ah	51.2V 300Ah	51.2V 400Ah	51.2V 500Ah	51.2V 600Ah	
Energy (kWh)	10.24	15.36	20.48	25.6	30.72	
Weight (KG)	200	260	320	380	440	
Dimension (L*W*H)mm	653*301.5*1368	653*301.5*1886		653*301.5*2404		
Operating Voltage Range (V)	43.2V~56.16					
Cell technology	Lithium-iron phosphate (LiFePO4)					
Life cycle	6000 times @80%DOD 25℃ 0.5C					
Max. charge/discharge current(A)	190					

PV Input

MAX PV Power (kw)	12	13
Max PV voltage (V)	500	
Max input current (input A/input B) (A)	14/14	
Max short current (input A/input B) (A)	20/20	
Start operating voltage (V)	90	
MPPT voltage range (V)	120~500	
No.of MPPT trackers	4	
String per MPPT tracker	1	

PRODUCT PARAMETERS-US standard TELiF-Ai0 48100 US

AC Output

Rated output power(kVA)	8	10
Max. apparent Power (kVA)	8.8	11
Max. output current(A)	38.3	47.8
Ac output voltage(V)	120/240(split phase), 208(2/3 phase), 230 (single phase)	
Frequency (Hz)	50/60	
PF	0.8lagging-0.8leading	
THDI	< 3%	
AC output topology	Split phase, 2/3 phase, single phase	

EPS output

Rated power(kVA)	8	10
Rated output voltage(V)	120/240 (split phase), 208 (2/3 phase),230 (single phase)	
Rated output current(A)	38.3	47.8
Rated frequency(Hz)	50/60	
Automatic switching time(ms) 20 THDI	< 2%	
Overload capacity	125%,60S/150%,1S	

PRODUCT PARAMETERS-US standard TELiF-Ai0 48100 US

General Data

Display	LCD
Communication	Modbus, RS485, WIFI, 4G
Operating temperature	-20 C ~55 C
Environment	Indoor
Relative humidity	5%~95%
Max. efficiency	≥98.2%
North American efficiency	≥97.2%
Cooling	Natural convection and Fan cooling
Certification	UL9540, UN38.3,MSDS

PRODUCT PARAMETERS-EU standard three phase TELiF-Ai0 48100 EU/T

Battery

Number of layers	1 layer	2 layers	
Dimension (L*W*H)	653*301.5*1328	653*301.5*1846	
Model	204.8V 52Ah	307.2V 52Ah	409.6V 52Ah
Weight(KG)	222.5	282.5	342.5
Energy(kWh)	10.65	15.97	21.3
Operating Voltage Range	172.8V~233.6V	259.2V~350.4V	345.6V~467.2V
Life cycle	6000 times @80%DOD 25 C 0.5C		
Rated charge/discharge current(A)	40A		

AC output

Rated output power(kVA)	10
Max. output current(A)	15.9
Grid voltage/range(V)	400/360~440
Frequency (Hz)	50/60

EPS output

Rated power(kVA)	11
Rated output voltage(V)	400
Max. output current(A)	15.9
Rated frequency(Hz)	50/60
Overload capacity	110%,30S/120%,10S/150%,0.02S

General Data

Battery charge /discharge efficiency	96.7%
DC Max. efficiency	98.2%
MPPT efficiency	99.5%
Ingress protection	IP65
Noise emission (dB)	<35
Operation temperature	25C~60C
Cooling	Natural Cooling

Singe/Three Phase Hybrid Inverter



Supports automatic battery switching



Support diesel generator input source



Compatible with lead-acid and lithium-ion batteries



Parallel available, intelligent BMS



Input power source priority can be set by users



Battery reverse connection protection, anti-power control function



PRODUCT PARAMETERS

Model Name	TN-INVT-SH3000	TN-INVT-SH4000	TN-INVT-SH5000	TN-INVT-SH6000
Off-grid Output				
Nominal Output Power	3000W	4000W	5000W	6000W
Nominal Voltage	220V/230V/240V			
Nominal Frequency	50/60HZ			
Nominal Output Current	13.6A	18.2A	22.7A	27.2A
Output THDu	<2%			
On-grid Parameter				
Nominal Output Power	3500W	5000W	6000W	6000W
Max. Output Current	18.2 A	22.7A	27.2A	27.2A
Nominal Grid Voltage	220V			
Max. loutput Current from Grid	16.4A	22.7A	27.2A	27.2A
Grid Voltage Range	184-264V			
Frequency Range	45-65HZ			


PRODUCT PARAMETERS


Model Name	TN-INVT-SH3000	TN-INVT-SH4000	TN-INVT-SH5000	TN-INVT-SH6000
PV Input				
Max. Input Power	4500Wp	6000Wp	8000Wp	9000Wp
Starting Voltage	75V			
Max. Input Voltage	600V			
MP PT Voltage Range	80-55OV			
Full Load MP PT Voltage Range	350-500V			
Number of MPPT	2			
Max. Input String Per MPPT	1			
Nominal Input Voltage	360V			
Max. Input Current	13A/13A			
Battery Parameter				
Battery Type	Lithium-ion			
Nominal Battery Voltage	48V			
Battery Voltage Range	42-60V			
Max. Charging Voltage	W60V			
Max. Charging/Discharging Current	75A	85A	100A	100A


PRODUCT PARAMETERS

Model Name	TN-INVT-SH3000	TN-INVT-SH4000	TN-INVT-SH5000	TN-INVT-SH6000
Efficiency				
Max. Efficiency	97.5%	97.8%	98.0%	98.0%
European Efficiency	97.2%	97.3%	97.5%	97.5%
Max. Battery Charging/ Discharging Efficiency	95.2%			
General Data				
Size(L*W*H)	515mm*490mm*184mm			
Weight	20kg			
Noise	<25dB(A)			
Operating Temperature Range	25°C~+60°C			
Cooling Method	Natural cooling			
Ingress Protection Grade	IP65			
Mornitoring	H5/LED/APP/WIFI/4C/Bluetooth			
Communication Port	RS485/CAN/DRED/DO/Para 1 lei port			
Protection	DC Switch, PV Insulation Resistance Detection, Residual Current Monitoring, Anti-islanding Protection, PV Reverse Polarity Protection, AC Short Circuit Protection, AC Overcurrent Protection, AC Overvoltage Protection, Surge Protection, Lightning Protection			
Certification				
CE_LVD	IEC 62109-1, 1 EC 62109-2, EN 62109-1, EN 62109-2			
CE_EMC	EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4			
Grid	VDE-AR-N 4105, VDE V 0126-1-1, C98, C99, CENELEC EN 50549-1, EN50549, NRS 097-2-1, AS 4777.2, R25			


Single-phase ESS Hybrid Inverter


- 


Supports automatic battery switching
- 

Support diesel generator input source
- 

Compatible with lead-acid and lithium-ion batteries

- 

Parallel available, intelligent BMS
- 

Input power source priority can be set by users
- 

Battery reverse connection protection,anti-power control function



Technical specification	R3KL1	R3K6L1	R4KL1	R4K6L1	R5KL1	R6KL1
Input (PV)						
Max. power (kW)	4.6	4.6	6	6	7	7
Max. DC voltage (V)	550					
MPPT voltage range (V)	125~500					
Max.input current of single MPPT (A)	14					
MPPT tracker/strings	2/1					
AC output						
Rated output power (kVA)	3	3.6	4	4.6	5	6
Max. output current (A)	13	16	17.4	20	21.7	26
Grid woltage/range (V)	230/176~270					
Frequency (Hz)	50/60					
PF	0.8lagging-0.8leading					
THDi	<3%					
AC output topology	L+N+PE					

Technical specification	R3KL1	R3K6L1	R4KL1	R4K6L1	R5KL1	R6KL1
-------------------------	-------	--------	-------	--------	-------	-------

Battery

Battery voltage range (V)	40~58					
Max.charging voltage (V)	58					
Max.charge/discharge current (A)	95/62.2	95/75	95/83.3	95/95.8	95/104.2	95/110
Battery type	lithium /Lead-acid					
Communication interface	CAN/RS485					

EPS output

Rated power (kVA)	3	3.6	4	4.6	5	6
Rated output voltage (V)	230					
Rated output current (A)	13	16	17.4	20	21.7	26
Rated frequency (Hz)	50 /60					
Automatic switching time (ms)	<20					
THDu	<2%					
Overload capacity	110%, 30S/120%, 10S/150%, 0.02S					

Technical specification	R3KL1	R3K6L1	R4KL1	R4K6L1	R5KL1	R6KL1
-------------------------	-------	--------	-------	--------	-------	-------

General data

Battery chage/discharge efficiency	95.0%
DC Max. efficiency	97.6%
Europe efficiency	97.0%
MPPT efficiency	99.9%
Ingress protection	IP65
Noise emission (dB)	<35
Operation temperature	- 25 ℃ ~60 ℃
Cooling	Natural
Relative humidity	0 ~95% (non-condensing)
Altitude	2,000m (>2,000 Derating)
Dimensions W*D*H (mm)	550*200*515
Weight (kg)	25
Isolation transformer	No
Self-consumption (W)	<3

Display and communication

Display	LCD
intercace:rs485/4G/wifi/can/DRM	Yes/ Opt/ Opt/ Yes/ Yes
Safety standard	IEC/EN62109-1/-2, IEC/EN62477-1
EMC	IEC/EN 61000-6-1, IEC/EN 61000-6-3
On-grid	South Africa NRS097-2-1:2017, UK G98, G99

Solar On/Off Grid Integrated Inverter

GH3600TL/4600TL/5000TL



Multiple operating modes, on-grid,off grid and UPS,MPPT charger built in.



Integrated smart APP, can remotely diagnose and update



DC couple and AC couple to retrofit existing solar system



Compatible with almost all 48V LiFePO4 battery pack



Frequency droop control, Max. 16pcs parallel



One key to reactive the LiFePO4 battery pack



Model	GH5000TL	GH4600TL	GH3600TL
PV Input (DC)			
Max. DC input power (W)	7000W	6600W	5200W
Max PV input voltage (V)	500V		
Starting voltage	150V		
PV input voltage range	150V-500V		
MPPT voltage range	120V-430V		
MPPT quantity	2		
Max string quantity toeach MPPT group	1		
Max input current	15A/15A		
Output/Input (AC)			
Rating output power	5000W	4600W	3600W
Maximum output apparent power	5500VA	5000VA	3960VA
Max output current	22.8A	22.8A	18A
Rating grid voltage	230V		
Rating grid frequency	50HZ		
Total current waveform distortion rate	<3% (Rating power)		
DC component	<0.5%In		
Power factor range	>0.99@Full power (Adjustable range 0.8lead-0.8lag)		

Model	GH5000TL	GH4600TL	GH3600TL
Off grid output			
Max output power	4500W	4500W	3600W
Rating output voltage	230V		
Rating output frequency	50Hz (60Hz Optional)		
UPS switching time	<20ms		
Total harmonic distortion (linear load)	<3%		
Overload capacity	110%, 30S/120%, 10/150%80ms		
Battery			
Voltage range	41.6V-58.5V		
Max charging current	95A (PV&AC Hybrid charging)	95A (PV&AC Hybrid charging)	80A (PV&AC Hybrid charging)
Max discharging current	100A	100A	85A
Battery type	Lithium-Ion battery / Lead-acid Battery		
Communication interface	RS485 / CAN		
Efficiency			
Max efficiency	98%		
European efficiency	97%		
Max discharge efficiency	95%		
MPPT efficiency	99.90%		

Model	GH5000TL	GH4600TL	GH3600TL
System			
Waterproof Rating	IP65		
Noise	<35dB		
Ambient temperature	-25℃ ~60℃		
Cooling mode	Natural cooling		
Ambient humidity	0-95% non-condensing		
Altitude	No derating below 2000m		
Shutdown self power consumption	<3W		
Display	LCD		
Communication	RS485/USB/CAN/Wifi (GPRS optional)		
Certificate	IEC62109-1, IEC62109-2EN61000-6-1, EN61000-1-3 VDE-AR-N4105, EN50549, G99, CEI-021, AS/NZS4777.2, RD1699 (UNE206006IN: 2011/UNE206007-1IN:2013/UNE217002:2020)		
Warranty	5Years		
Mechanical			
Dimension	580mm×350mm×230mm		
Installation	Wall Mounted		
Weight	23.5Kg		

CESS

Commercial and Industrial Energy Storage Solution

| Product Application



Uninterrupted Power Supply

Less space, longer life and more power than traditional UPS system.



Peak-shifting

Balance the electricity input and output to provide the most economical power supply.



Energy Integration

Integrated with existing energy facilities, like solar, diesel generators and so on.



Outdoor Battery Energy Storage Cabinet

- Real-time data backup.
- Automatic fire fighting system with high safety.
- Grid and off-grid switching functions.
- One-button start, automatic operating, and it supports multiple parallel connections.
- Protection class IP55, suitable for outdoor use.
- Four layers of safety protection design for higher safety and reliability.
- Remote viewing service.



PRODUCT FEATURE

- All-in one integrated design
- LiFePo4 battery
- Support parallel mode
- Support Solar/City Grid
- EMS/Cloud APP

APPLICATION

- Small industrial and commercial
- Industrial parks
- Commercial buildings
- Solar storage and charging stations
- Microgrid power backup

CERTIFICATES

GB/T 36558 IEC 62933
GB/T 34120 UN3480
UK G99 UN38.3
IEC62619

PRODUCT PARAMETERS

Model	CESS-AiO 30P M30S ESS215	CESS-AiO 60P M60S ESS215
Cell type	LiFePO4, 3.2V 280Ah	LiFePO4, 3.2V 280Ah
System configuration	1P100S (5 Modules) ~1P240S (12 Modules)	1P140S (7 Modules) ~1P240S (12 Modules)
Battery capacity (BOL)	89kWh~215kWh	125kWh~215kWh
Battery voltage range	320V-864V	448V-864V
AC On-grid Parameters		
Grid type	3P4W	3P4W
Rated charge/discharge power	30kW	60kW
Rated grid voltage	AC400V	AC400V
Grid voltage range	-15%~+15%	-15%~+15%
Rated grid frequency	50Hz	50Hz
Frequency range	±5Hz	±5Hz
Rated current	43A	86A
Power factor	0.8 (Leading) ~0.8 (Lagging)	0.8 (Leading) ~0.8 (Lagging)
Output harmonics	≤3%	≤3%

PRODUCT PARAMETERS

☉AC Off-grid Parameters

Rated output power	30kW	60kW
Rated output voltage	AC400V	AC400V
Rated output frequency	50Hz	50Hz
Rated current	43A	86A
Voltage accuracy	1%	1%
Frequency accuracy	0.2Hz	0.2Hz

☉General Parameters

Dimension (W*H*D)	1900mm*2100mm*1230mm (BOL<125kWh, the width is 1500mm)	1900mm*2100mm*1230mm
Max. weight	2500kg	2500kg
Application	Outdoor	Outdoor
Seismic intensity rating	8 degree (IEC60980)	8 degree (IEC60980)
Anti-corrosion grade	C3	C3
Operating temperature	-20 C ~50 C	-20 C ~50 C
Relative humidity	0-95% (Non-condensing)	0-95% (Non-condensing)
Altitude	<2000m	<2000m
Cooling method	Battery room: air conditioning Electrical room: forced air cooling	Battery room: air conditioning Electrical room: forced air cooling

PRODUCT PARAMETERS

Noise	≤75dB	≤75dB
System efficiency	≥85%	≥85%
Fire fighting system	Automatic fire extinguishing	Automatic fire extinguishing
Fire extinguishing media	FM200	FM200
Communication interface	Ethernet	Ethernet
Communication protocols	Modbus TCP/IP	Modbus TCP/IP

☉Photovoltaic Side Parameters

Maximum input module power	30kW or 60kW	60kW
MPPT voltage range	200V-850V	200V-850V
Number of MPPT paths	1	1
Number of PV input channels	1	1
Maximum input current	100A	100A

☉STS Static Switch (Optional)

Rated power	60kW (Grid side 30kW, Load side 30kW)	120kW (Grid side 60kW, Load side 60kW)
Switch time	≤20ms	≤20ms

Energy Storage Battery Cluster



Industrial and commercial energy storage integrated cabinet		Battery DC cabinet	
Model	TNA1240-280	TNL1240-280	TNL1416-280
Rated power (kWh)	215	215	372
Nominal voltage (V)	768	768	1331.2
Working voltage (V)	672~864	672~864	1164.8~1497.6
Cycle life (@25℃)	8000times	8000times	8000times
Battery module	3.2V280Ah/16S Air cooling plug-in box	3.2V280Ah/52S Liquid cooling plug-in box	3.2V280Ah/52S Liquid cooling plug-in box
Dimensions (W*D*H)	1600*1270*2340mm	1350*1400*2100mm	1500*1350*2270mm
Reference weight (kg)	2500	2500	3600

Energy Storage System



Model	TN-S-10P416S-280-LA	TN-S-12P416S-314-LA
Size (W*D*H)	6800*2600*3000mm	6250*2438*2896mm
Maximum weight(t)	38	40
Rated capacity (Ah)	2800	3768
Rated voltage (V)	1331.2	1331.2
Battery box used	3.2V280Ah/52S Liquid cooling plug-in box	3.2V314Ah/52S Liquid cooling plug-in box
Number of series and parallel connections	1P416S*10	1P416S*12
Rated charge and discharge power	0.5P	0.5P
System power (kWh)	3727.36	5015.96

PROJECT CASES

Project Cases



 Datang Lubei Energy Storage Project
100MW/200MWh



 China Southern Power Grid Chengbei Station Energy Storage Project
15MW/30MWh



 Yuanhe Energy Hunan Liyujiang Thermal Power Frequency Modulation Project
12MW/12MWh



 Huzhou Changxing Jinling Energy Storage Project
12MW/48MWh



 "Heping smart storage" Comprehensive Smart Energy Shared Energy Storage Project
100.8MW/1061.683MWh



 Changqiang steel plant energy Storage Project
25.2MW/243.3MWh



Project Cases



MIZUDA Group Energy Storage Project
1MW/2MWh



Jiangsu Shuyang Energy Storage Project
0.6MW/4MWh



Huzhou Production and Investment Energy Storage Project
10MW/20MWh



Tianneng Battery Group Headquarters Energy Storage Project
5MW/10MWh

Partner



State Grid Corporation Of China



China Datang Corporation Ltd.



China Energy Conservation & Environmental Protection Group



China Energy Engineering Corporation Limited



China Southern Power Grid



State Power Investment Corporation Limited



China Silver Group



China power construction group co. LTD



China Three Gorges Renewables (Group) Co., Ltd.



Zhejiang Energy Group Cp Ltd.



China Unicom



Gansu Golden Specialized Fund



China Huaneng Group Co.,Ltd.



China Railway Construction Corporation Limited



JD Energy



Huzhou Industrial Group



Xi'an Energetic Intelligence Technology Co.



Towngas



Beijing Yuanhe Energy Co.



Eternal Aisa



CONTACT US NOW!

TIANNENG BATTERY GROUP CO., LTD
TIANNENG INTERNATIONAL CO., LIMITED

+86-572-6058015

+86-572-6058015

info@tianneng.com

www.tiannengglobal.com

HQ Add:
18#Baoqiao Rd.Huaxi industry park.Changxing.
Zhejiang Province.China

INT HQ Add:
Block C.6/F shun shing plaza, 50 stanley
street, central, Hong Kong

in Tianneng Group Official

Twitter Tianneng Group Official (@GroupTianneng)

YouTube Tianneng Group



Website



Electronic brochure